


SPECIFICATION SHEET: SMALL CUTTING STATION

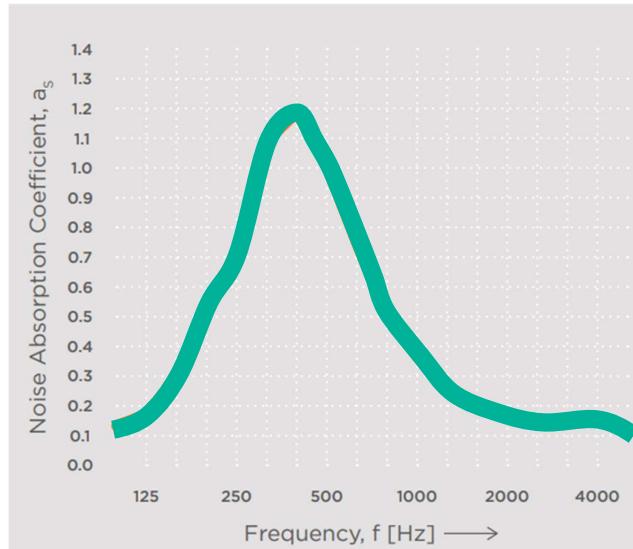

Max Noise Reduction (Lab Tested)*	38.5 dB (in all directions)
Max Noise Absorption (Lab Tested)*	97% (in all directions)
Height	2100mm
Width	2400mm
Length	2400mm
Weight	96 kg + 12 kg Wheels
Water resistant test standard*	BSEN 60529:1992 IPX6/IPX9
Fire resistant test standard*	BS 7837-1996 (barriers), class B1 (windows/roof)
Dust resistant test standard*	BSEN 60529-1992
Cold resistant test standard (result)*	BSEN 60068/2/1:2007 (-40°C)
UV resistant	3 years (USA + Canada), 5 years (rest of the world)
Safety features	Night-time reflective strips, hazard icons
Quick install	2 persons in 15 minutes, foldable
Installation kits	Not required
Frame components / weights	Rear frame x 1 = 10 kg, side frame x 2 = 8 kg each, front roof frame x 1 = 6kg, roof support x 1 = 2 kg, wheels x 4 = 3 kg each
Acoustic components / weights	PVC roof cover = 10.1kg, acoustic side windowed double panel x 2 = 11.9 kg each, acoustic front panel with plastic door strips = 17.3kg, air extractor panel =11kg
Window option	Included – Window opening can be configured to suit any width of material by simply folding the panels
Ventilation option	Includes integral air extraction hood
Adjustable	Yes – Height only
Wheels	Yes – lockable
Anti-theft	Security cable, data tag
Cleaning	Power wash
Identification code part number	Unique RFID number per unit
Color options	On request