


SPECIFICATION SHEET: LARGE CUTTING STATION

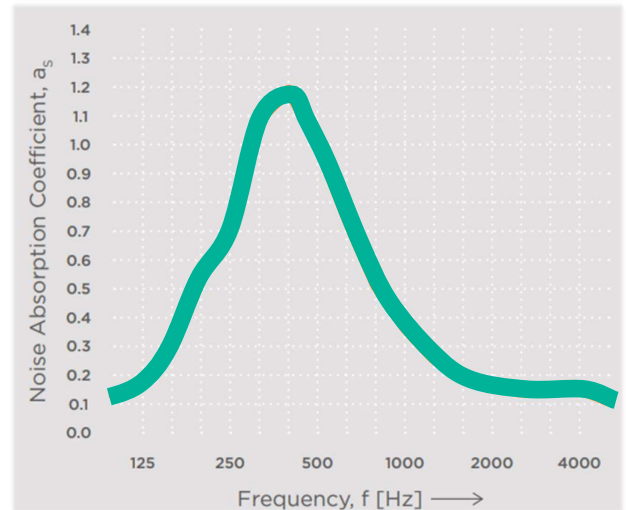

Max Noise Reduction (Lab Tested)*	43 dB (in all directions)
Max Noise Absorption (Lab Tested)*	100% (in all directions)
Height	6 ft 11 in (2100 mm)
Width	7 ft 10 in (2400 mm)
Length	10 ft 8 in (3250 mm)
Weight	260 lb (118 kg) + 40 lb (18 kg) Wheels
Water resistant test standard*	BSEN 60529:1992 IPX6/IPX9
Fire resistant test standard*	BS 7837-1996 (barriers), class B1 (windows/roof)
Dust resistant test standard*	BSEN 60529-1992
Cold resistant test standard (result)*	BSEN 60068/2/1:2007 (-40°C/F)
UV resistant	3 years (USA + Canada), 5 years (rest of the world)
Safety features	Night-time reflective strips, hazard icons
Quick install	2 persons in 15 minutes, foldable
Installation kits	Not required
Frame components / weights	Rear frame x 1 = 15 lb (7 kg), side frame x 2 = 24 lb (11 kg) each, front roof frame x 1 = 9 lb (4 kg), rear roof frame x 1 = 6.6 lb (3 kg), wheels x 6 = 6.6 lb (3 kg) each
Acoustic components / weights	PVC roof cover = 23.5 lb (10.7 kg), acoustic roof barrier = 12 lb (5.5 kg), acoustic side windowed double panel x 2 = 26.5 lb (12 kg) each, H9 acoustic panel x 2 = 12 lb (5.5 kg), acoustic front panel with plastic door strips = 38.5 lb (17.5 kg), air extractor panel = 26.5 lb (12 kg)
Window option	Included – Window opening can be configured to suit any width of material by simply folding the panels
Ventilation option	Includes integral air extraction hood
Adjustable	Yes – Height only
Wheels	Yes – lockable
Anti-theft	Security cable, data tag
Cleaning	Power wash
Identification code part number	Unique RFID number per unit
Manufacturer's warranty	1 year
Color options	On request