



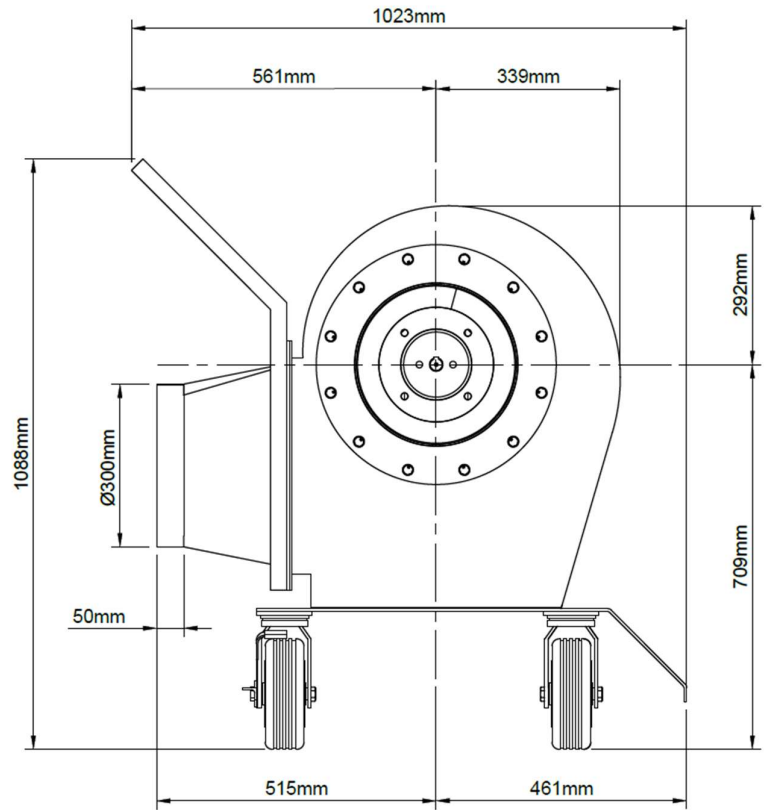

ANTI-STATIC FUME FILTRATION KIT:

1. 337mm Centrifugal Fan
2. 5,000 m³/hr Air Scrubber
3. Anti-Static Duct
4. Hood


SPECIFICATION SHEET: CENTRIFUGAL FAN 337MM

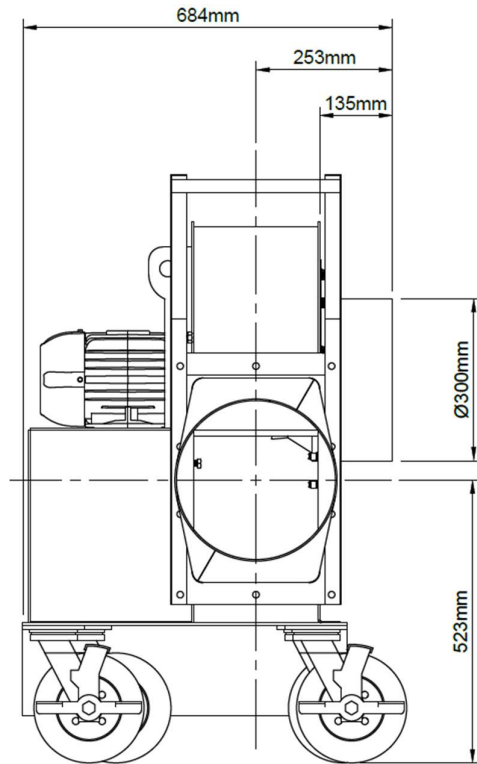


SPECIFICATIONS

Airflow (m³/hr):	5,800
Motor Power:	2.2kW, 2900rpm
Current Draw	4.8A
Voltage & Connection	240V, 1-Phase, 10A
Duct Diameter:	300mm
Dimensions LxWxH (mm):	1023 x 684 x 1088mm
Weight:	100kg
Lifting Method:	Forklift/Lifting Slings
Options:	Silencers Zones 1/2/21/22 20 Amp Plug Speed Controller
Temperature:	Range: -20°C to +55°C <i>*High-Temperature available on request</i>


FAN CURVE

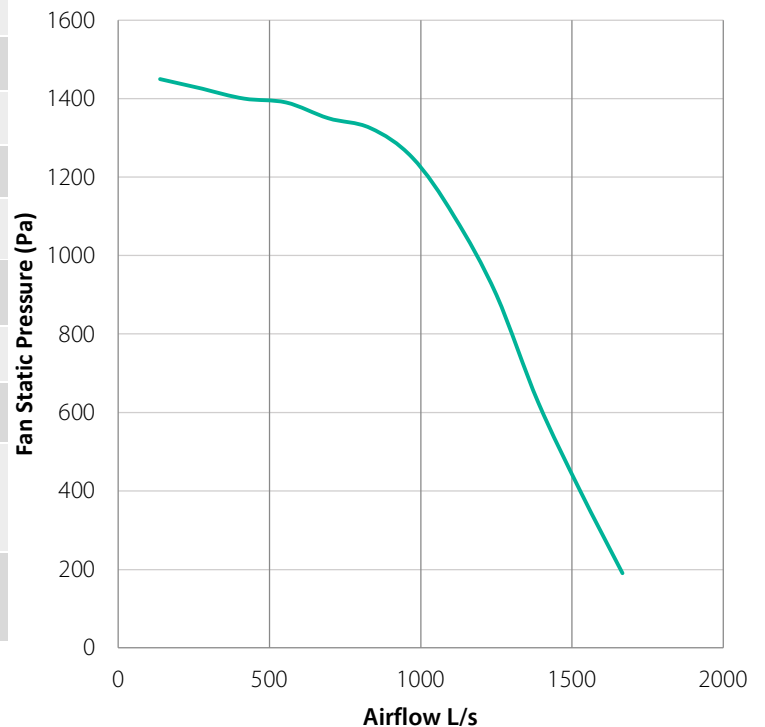

SPECIFICATION SHEET: 5,000M³/HR AIR SCRUBBER

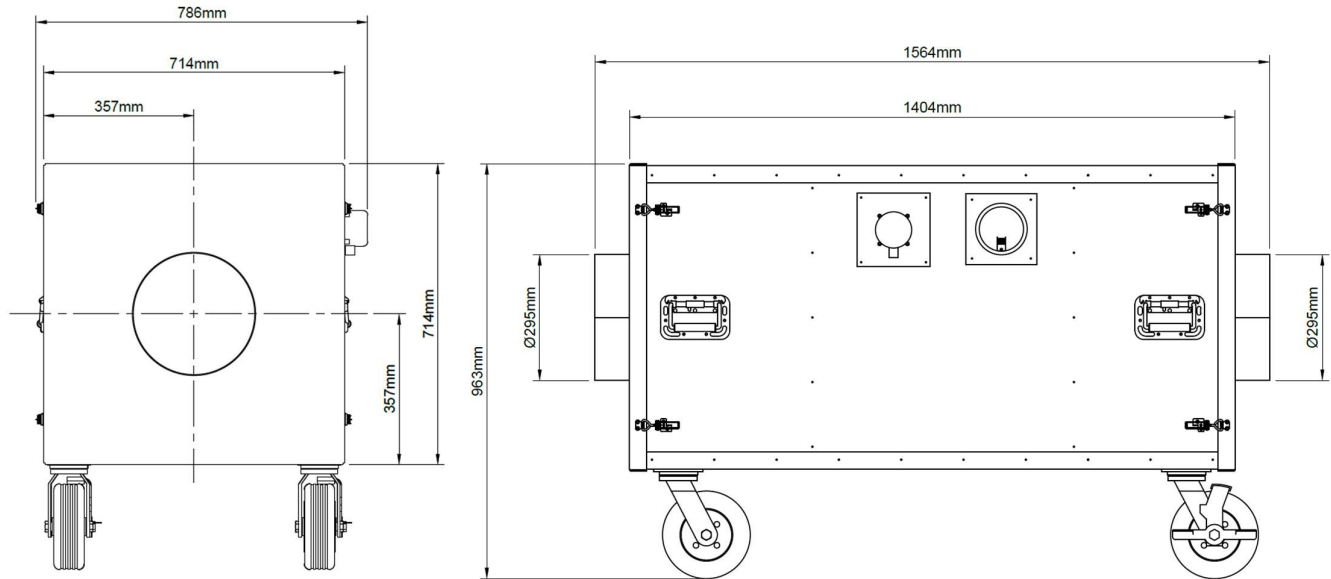

SPECIFICATIONS	
Airflow (m³/hr):	5,000
Duct Diameter:	300mm
Dimensions LxWxH (mm):	1564 x 714 x 963
Weight:	100kg
Lifting Method:	Forklift
Filter Options:	3-Stage Filtration: H13 HEPA (standard/high capacity) F9 (standard/high capacity) F5 (standard/high capacity) Activated Carbon
Alarms:	Pressure Gauge, Light & Alarm
Additional Info:	Sliding Filter Frame Activated Carbon Filter suitable up to 40°C H13, F9 & F5 Filter suitable up to 70°C Stackable Mobile

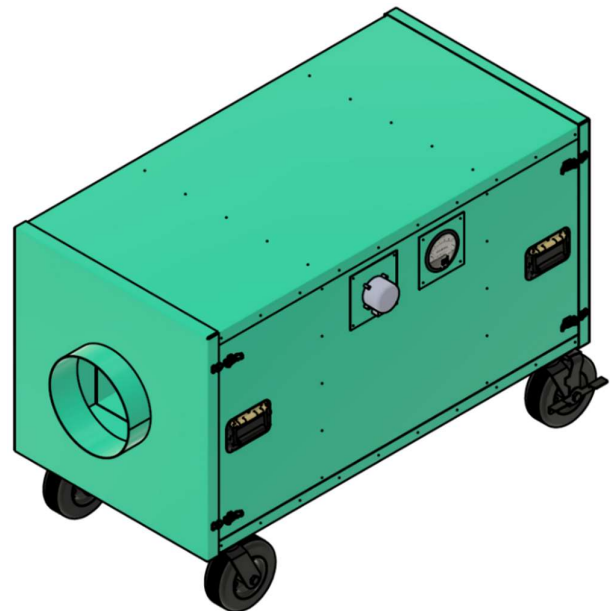

SPECIFICATION SHEET: ANTI-STATIC DUCT, HOOD



ANTI-STATIC DUCT

Diameter:	305mm @ 5m
Type:	Negative Pressure Flexible



HOOD

Dimensions:	600mm x 600mm
Airflow:	300mm