





MULTI-PORT WELDING FUME FILTRATION KIT:

1. H-510mm Centrifugal Fan
2. 5,000 m3/hr Air Scrubber
3. Exhaust Ducting
4. Fume Exhaust Hose/s
5. Hood/s


SPECIFICATION SHEET: CENTRIFUGAL FAN H-510MM

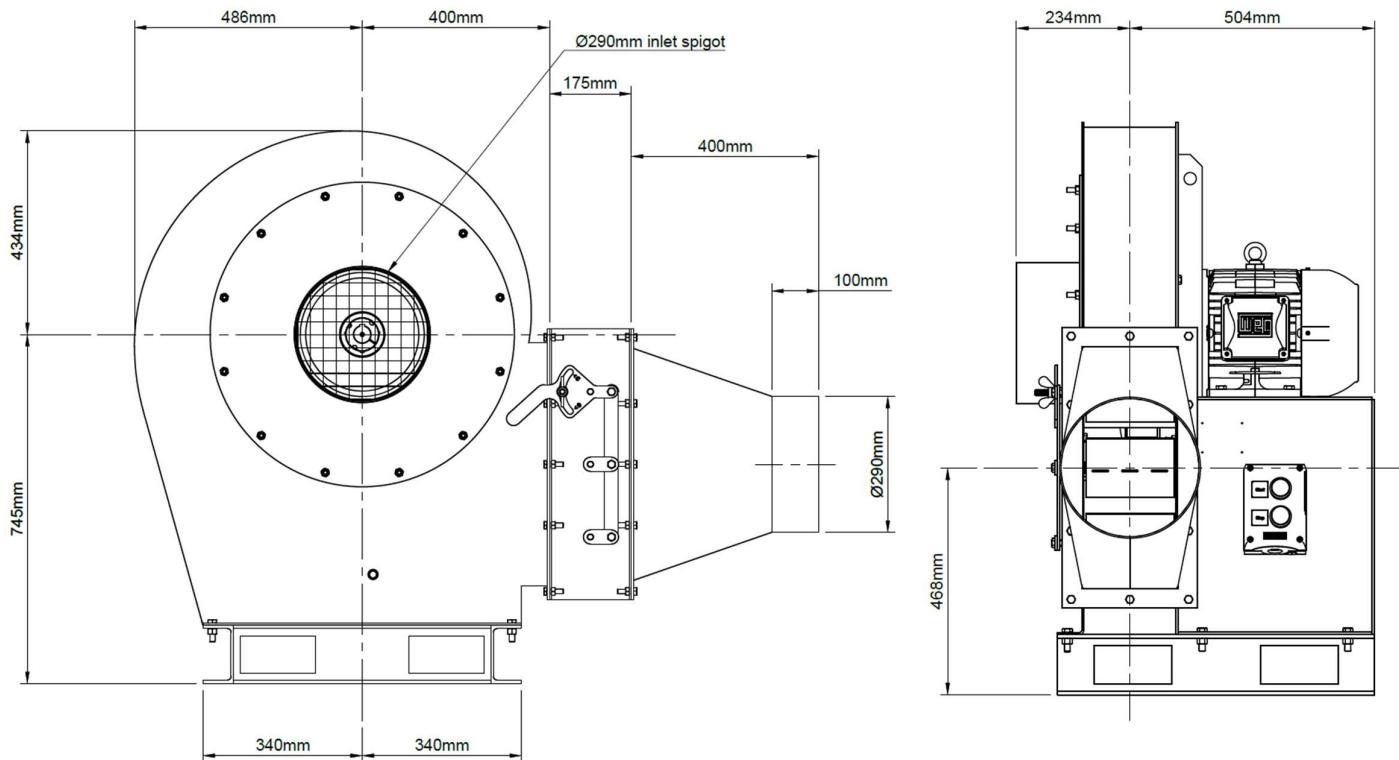


| SPECIFICATIONS | |
|-------------------------------|--|
| Airflow (m ³ /hr): | 8,500 |
| Motor Power: | 7.5kW, 2940rpm |
| Current Draw | 13.8A |
| Voltage & Connection | 415V, 32A, 4-Pin |
| Duct Diameter: | 305mm |
| Dimensions LxWxH (mm): | 1461 x 738 x 1179mm |
| Weight: | 250kg |
| Lifting Method: | Forklift/Lifting Slings |
| Options: | Silencers Zones 1/2/21/22 Speed Controller |
| Temperature: | Range: -20°C to +40°C <small>*High-Temperature available on request</small> |

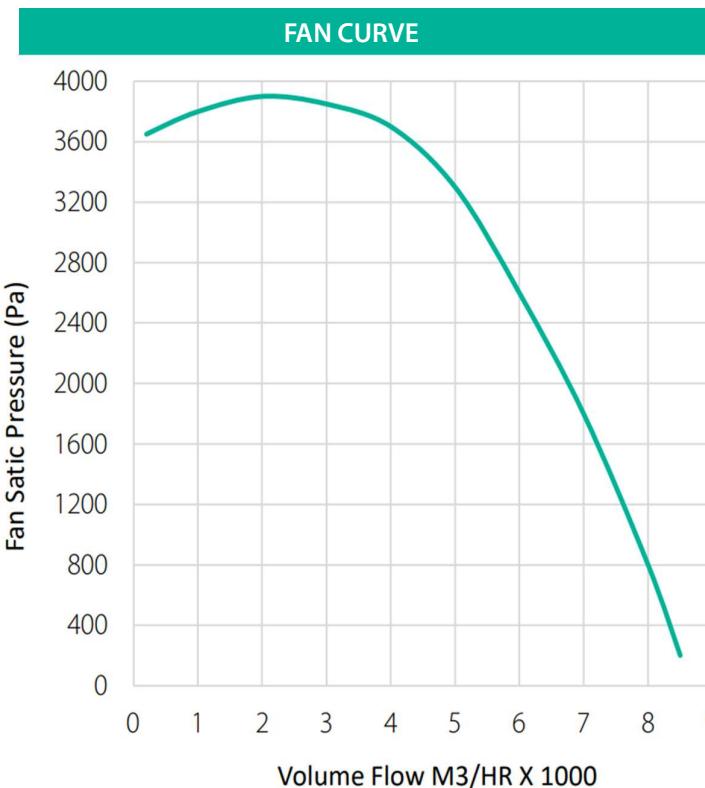

SPECIFICATION SHEET: 5,000M3/HR AIR SCRUBBER

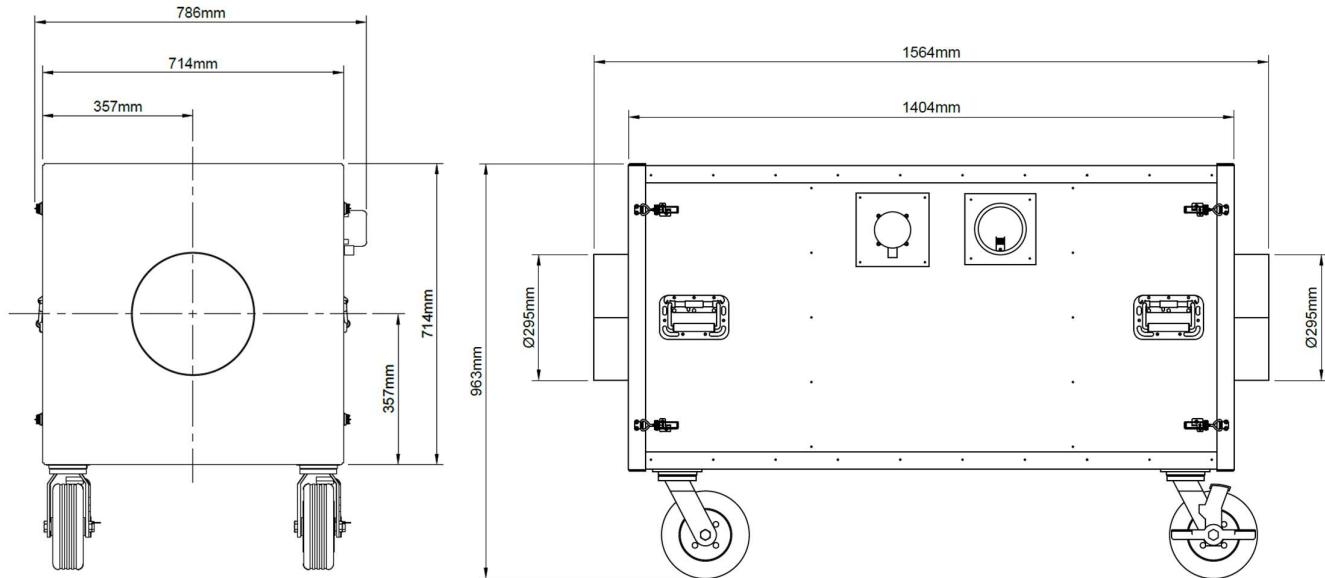

| SPECIFICATIONS | |
|------------------------------------|--|
| Airflow (m³/hr): | 5,000 |
| Duct Diameter: | 300mm |
| Dimensions LxWxH (mm): | 1564 x 714 x 963 |
| Weight: | 100kg |
| Lifting Method: | Forklift |
| Filter Options: | 3-Stage Filtration: H13 HEPA (standard/high capacity) F9 (standard/high capacity) F5 (standard/high capacity) Activated Carbon |
| Alarms: | Pressure Gauge, Light & Alarm |
| Additional Info: | Sliding Filter Frame Activated Carbon Filter suitable up to 40°C H13, F9 & F5 Filter suitable up to 70°C Stackable Mobile |

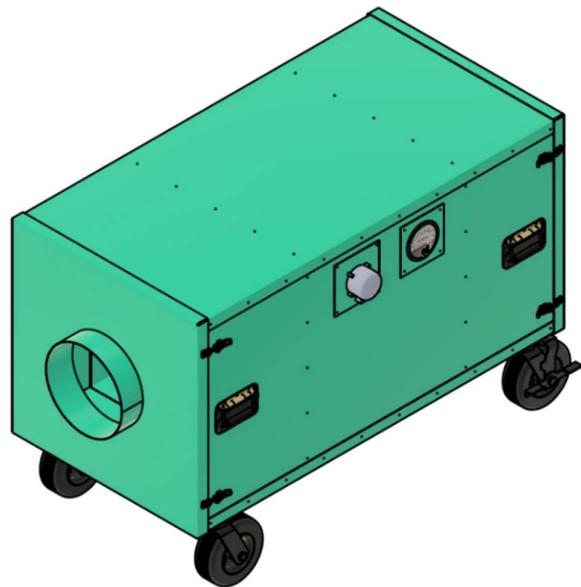

SPECIFICATION SHEET: EXHAUST DUCTING, EXHAUST HOSE,



EXHAUST DUCTING

| | |
|------------------|----------------------------|
| Diameter: | 305mm @ 5m |
| Type: | Negative Pressure Flexible |



HOSE

| | |
|-----------------|------------|
| Length | 5m/10m/20m |
| Airflow: | 300mm |