CONTROLHIRE

USER GUIDE: FOG LANCE














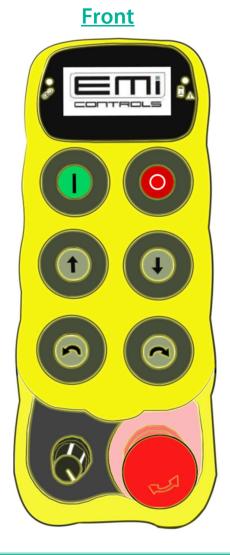




ON/RADIO LINKING BUTTON

(on the back of the remote) Turns Remote On Links Remote to Lance





- 1. Place fogging lance in desired/recommended location.
- 2. Unstrap the top post with spray heads and lift up (using caution as it is top heavy.) Whilst holding the top post up, use the latch to lock the two posts together and insert the safety pin as pictured:

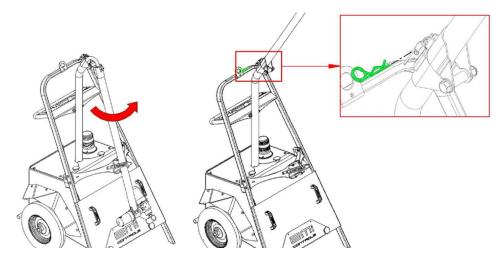

- 3. Connect water supply to fogging lance and turn water supply **on.**
- 4. Connect fogging lance to power supply: **32AMP 5Pin Round** (or if you have requested a 10KVA Generator then use the adaption 20AMP 4Pin Round into generators power board)
- 5. Ensure water and electrical supply is **on** and the fogging lance is turned **on** from the isolator switch. The **amber light** will start flashing once the unit has power.
- 6. Turn the fogging lance remote on by turning the remote over and holding the On/radio linking button for approximately 2 seconds and release. (check that the emergency stop button is not locked by twisting and pulling outwards until it clicks.)
- 7. Once the remote is turned on the link symbol will flash green.
- 8. Press and hold the on/radio linking button on the back of the remote again for approximately 5 seconds. The fogging lance will siren a long beep to confirm linking successful and the link light will be solid green.
- 9. Press and hold the red Stop Button (**not the emergency stop**) to clear any warning on the unit.
- 10. Press the Start Button on remote to start fogging.
- Use the Left, Right, Up and Down buttons to position the fog. Once in desired location you can use the oscillation to move left and right.
 To stop, simply press the Stop Button once. This will keep the remote on and linked until all power sources are turned off.
- 12. Press the green Start Button on the remote to start fogging

- 13. Use the **Left**, **Right**, **Up** and **Down** buttons to position the fog. Once in desired location you can use the oscillation to move left and right.
- 14. To stop, simply press the Stop Button once. This will keep the remote on and linked until all power sources are turned off.

Additional Notes

Spare battery and charger for the battery will be supplied in the yellow pouch on the fog lance with the remote.

Please keep spare battery on charge and rotate battery daily to ensure they stay charged.

Charging time is approximately 8 hours.

For any further assistance connecting the remote please refer to the link: https://youtu.be/zxfWRkMGnWo or contact our office on **02 8610 5677**